

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Multi-product EPD based on a representative product

Corrugated empty conduits with standard, low-friction, halogen-free or UV-resistant formulation & with the diameters of 16, 20, 25, 32 & 40 mm.


from

Preflexibel NV



Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	EPD-IES-0017063
Publication date:	2024-11-05
Valid until:	2029-11-05

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

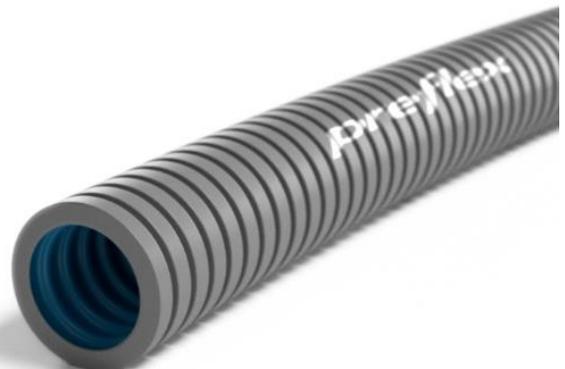

General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
EN 15804:2012+A2:2019. CEN TC 350. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.
Life Cycle Assessment (LCA)
LCA accountability: info@enperas.com , <i>Enperas, Belgium</i>
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> EPD verification by individual verifier Third-party verifier: <i>Marcel Gomez, info@marcelgomez.com</i> Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD: Preflexibel NV

Contact: Pieterjan Poelaert, pieterjan.poelaert@conduitlife.com

Description of the organisation: Preflexibel, which is part of the Wienerberger group, is a leading manufacturer of pre-wired and empty corrugated flexible conduits for cable management.

Product-related or management system-related certifications: EN 61386-1/EN 61386-22.

Name and location of production site(s): Ninove, Belgium

Product information

Product name: Standard or Low-Smoke (halogen free) PP conduits, with optional Low Friction, UV resistant additives with a diameter of 16, 20, 25, 32, 40 mm.

Name	Diameter, mm
Flame retardant corrugated conduit ('standard')	16, 20, 25
Halogen-free flame retardant corrugated conduit ('LS0H')	
Flame retardant corrugated conduit with low-friction inner layer ('LF')	
Halogen-free flame retardant and UV-resistant compound corrugated conduit ('LS0H UV')	
Halogen-free flame-retardant corrugated conduit with low-friction inner layer and UV-resistant compound ('LS0H UV LF')	
Flame retardant corrugated conduit with low-friction inner layer and UV-resistant compound ('LF UV')	32, 40
Flame retardant corrugated conduit ('standard') large diameter	

Product identification: ICTA 3422, CPC/HS code: 39173100

Product description: Corrugated empty PP conduit in diameter 16/20/25/32/40 mm with standard or halogen-free flame retardant, optional low-friction inner layer & optional UV-resistant compound.

More information [on the company website](#).

Manufacturing process:

Production is done completely in the plant located in Ninove.

The production consists of following steps:

1. Dosing (weight) of the raw materials (PP, colour, flame retardant, compound, release agent, ...)
2. Extrusion: materials are mixed and melted
3. Corrugation: the melted materials are pushed through a mould.
4. Cooling using city water (closed circuit)
5. Meter marking & diameter control
6. Wrapping: the rolls are measured and wrapped in plastic foil. After this, they are put on a pallet which on its turn is wrapped.

LCA information

Declared unit: 1 kg of empty corrugated conduit

Reference service life: Not applicable

Time representativeness: collected data is representative of the year 2023

Database(s) and LCA software used: SimaPro 9.5.1, Ecoinvent 3.9.1 database

Description of system boundaries: Cradle-to-gate with modules C1–C4, module D and optional module A5 (A1–A3, A5, + C + D)

Geographical scope: Europe

Included processes and scenarios used:

A1 – A3:

This module includes:

- production (extraction, pre-treatment, production steps) and transport of raw materials
- production of packaging, ancillary materials and transport of it
- Input of energy consumed during manufacturing and output of scrap.
- Treatment of raw materials' packaging waste.

Electricity mix used for modelling:

Electricity, medium voltage {BE} | electricity, medium voltage, residual mix | Cut-off, U with 0.1996 kg CO₂ eq/kWh.

Preflex purchases electricity from the grid, without GOO certificates, therefore, residual mix for Belgium has been used for modelling.

A5:

This module is out of scope of this study. However, packaging of conduits becomes waste at this stage. Therefore, treatment of packaging waste has been included in A5.

End-of-life scenarios based on Eurostat packaging waste statistics for Europe were used for modelling. That has been done in order to balance biogenic carbon in packaging, which is entering the system in module A3.

Table 1: Packaging waste treatment scenarios in A5

Packaging type	Transport distance to treatment	To sorting	To landfill	To recycling	To incineration
		0 km	50 km	200 km	150 km
Plastic foils		100% (0.0258 kg)	39% (0.01 kg)	29% (0.01 kg)	32% (0.008 kg)
		100% (0.095 kg)	38% (0.036 kg)	30% (0.029 kg)	32% (0.03 kg)

C1 – C4, D:

End-of-life scenario for the corrugated conduits was taken from PlasticsEurope report of 2022¹ for building & Construction materials and is the following:

- 25% goes to recycling
- 45% goes to energy recovery/incineration
- 30% goes to landfill

Table 2: End-Of-Life scenario for corrugated conduits

	To sorting (C3-C4)	To recycling (C3)	To landfill (C4)	To incineration (C4)
Polypropylene conduits	100% 1 kg	25% 0.250 kg	30% 0.300 kg	45% 0.450 kg
Transport to treatment (C2), 16-32 t EURO6 truck	30 km	200 km	50 km	150 km

C1:

Deconstruction is assumed to be manual process in most of the applications.

In the cases where machines are involved (complete demolition), wire conduits are mostly part of a larger construction being demolished. In this case, impacts attributed to profiles are negligible. As a consequence, no inputs were modelled in this step.

C2:

¹ <https://plasticseurope.org/knowledge-hub/the-circular-economy-for-plastics-a-european-overview-2/>

Discarded wire conduits are first transported to sorting for 30 km and then to either recycling for 200 km, to incineration for 150 km or landfill for 50 km.

C3:

Impacts of sorting & preparation recycling of 0.250 kg of PP conduits have been considered in this module.

C4:

Parameter	Value/Description
Collection process, per type	0.75 kg (75%) collected and sorted as polyolefin waste
Recovery, per type	0.450 kg (45%) incinerated with efficiency <60%
Disposal, per type	0.300 kg (30%) landfilled
Assumptions for scenario development	Transported for 30 km to sorting, 150 km to landfill and for 50 km to incineration with the 16-32t, EURO6 truck.

D:

Module D consists of:

- burdens & benefits related to the recycling of PP conduits.
- burdens & benefits related to the recycling of packaging in A5.
- benefits of potential energy recuperation from incineration of packaging in A5 and incineration of PP conduits in C4.

Table 3: Modelling of module D

Material exiting the system boundary	Process at the system boundary	Material/energy recovered/substituted	Related quantity
PP	Recycling	Polypropylene	0.250 kg
	Incineration	Energy recovered	0.450 kg
Plastic packaging	Recycling	Plastic (PE)	0.0075 kg
	Incineration	Energy recovered	0.008 kg
Wood (packaging)	Recycling	Wood chips	0.057 kg
	Incineration	Energy recovered	0.06 kg

Cut-off rules, allocation & other relevant information:

Cut-off criteria:

Cut-off criteria described in EN15804+A2 has been followed: 5% of energy and materials by module and 1% of total energy and raw materials. With these cut-off criteria, the importance of omitted flows is minor and the risk that omitted flows will influence the final conclusions is negligible.

The following processes are considered below cut-off and represent less than 5% of material and energy per module and less than 1% of the total material and energy use:

- All activities and energy use related to the offices and personnel.
- Treatment of waste coming from ancillary materials.
- Some of the ancillary materials.
- Water used for cooling, as it is in a closed circuit.
- Transport of ancillary materials to the production site.
- Potential inputs needed for demolition.

Long term emissions are excluded.

Infrastructure processes are included.

Allocation:

For processes, where allocation is necessary (multiple input or output processes), the allocation procedure described by the European standard EN 15804+A2 has been followed. Wherever possible, allocation was avoided by dividing the unit process to be allocated into two or more sub-processes and collecting the input and output data related to these sub-processes. Where allocation cannot be avoided, the inputs and outputs of the system were partitioned between its different products or functions in a way that reflects the underlying physical relationships between them. Co-production, allocation of secondary materials or secondary fuels are not applicable for this study.

Variability:

This EPD covers a range of empty wire conduits. Environmental impacts in this EPD are representative of a reference product (20 mm composition with standard flame retardants). Reference product has been selected in a way to ensure minimal deviations of results compared to other products covered by this EPD. Variability study has been performed. Results for GWP of other products deviate between -1% and +14%.

Data quality:


The data quality is assessed according to the EN15804+A2 and General Programme instructions of International EPD System (version 5, Annex A).

All the amounts, distances, material types, transportation types, energy inputs, etc. are data specific to and provided by Preflex.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP results for A1-A3
Production of PP	Database	Ecoinvent 3.9.1	2023	Representative general data	0%
Total share of primary data contributing to GWP in A1-A3:					0%

The reported share of primary data is associated with uncertainty, as one or several EPDs that are used as data source lack information on the share of primary data used.

System diagram:

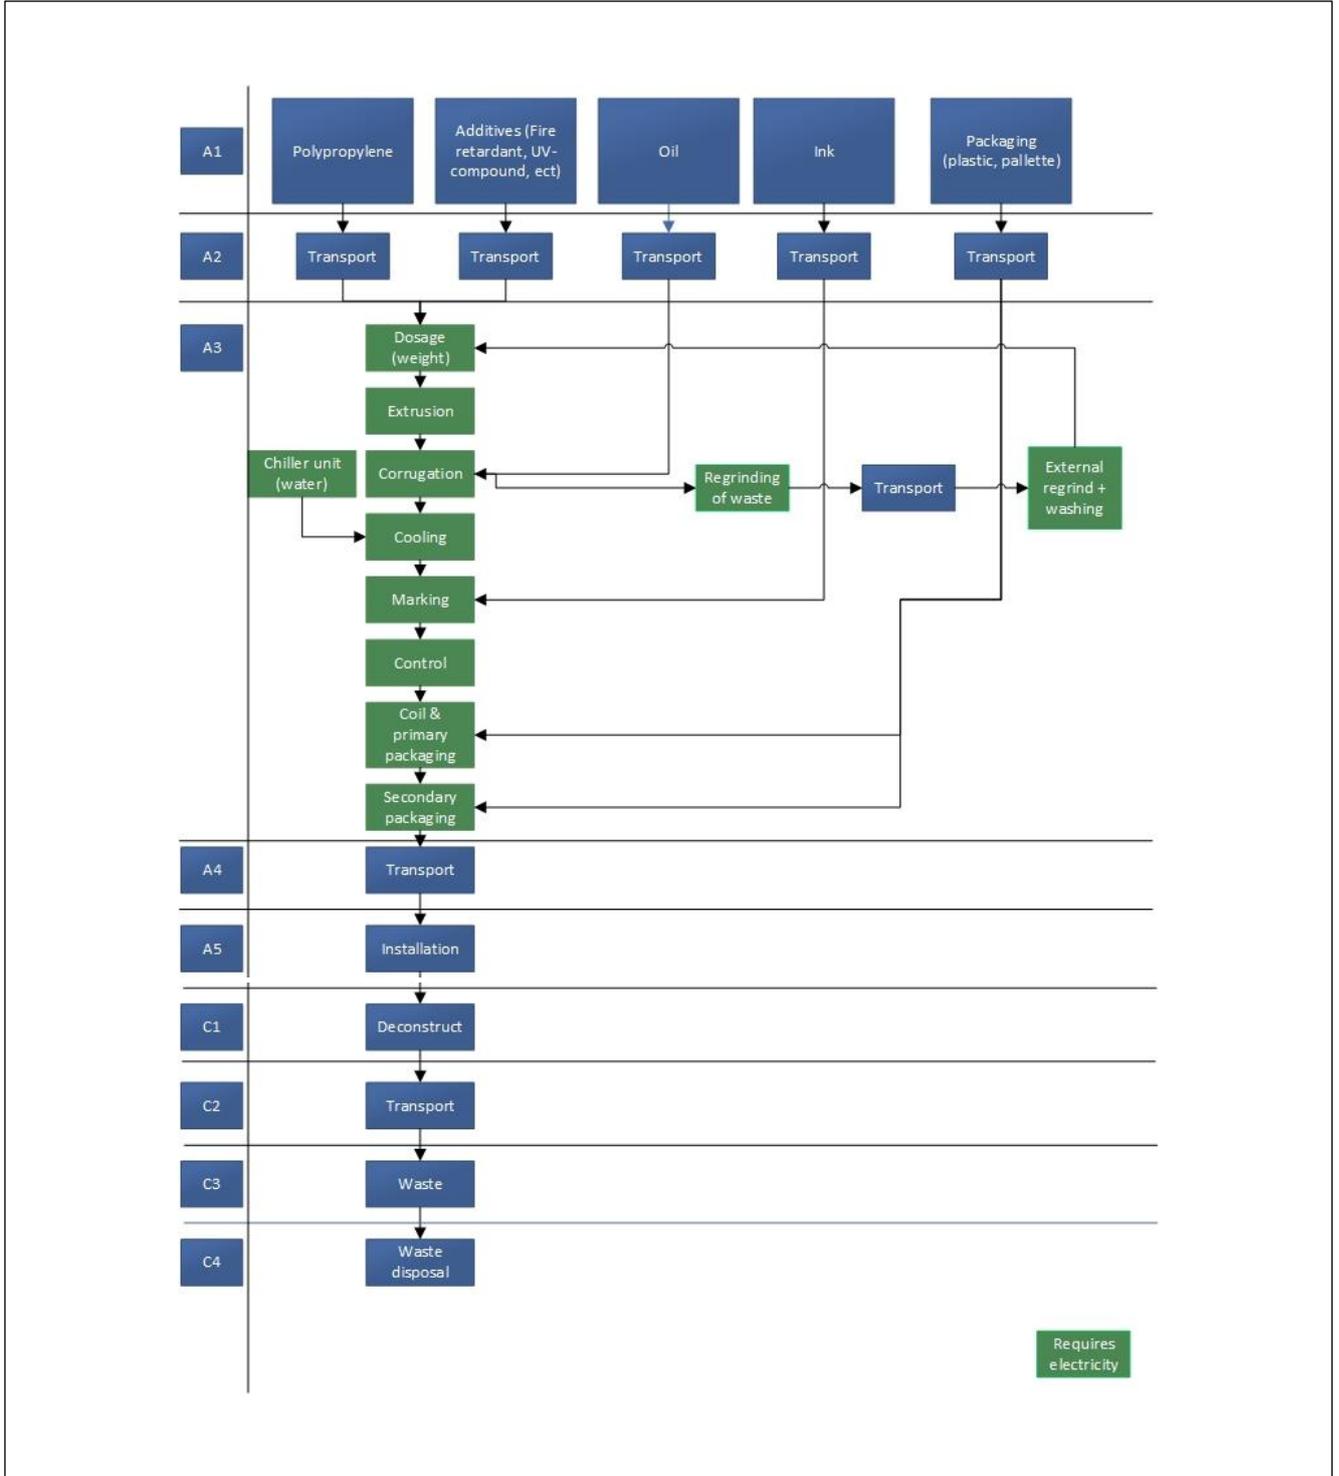

More information: <https://preflex.be/en>

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	ND	x	ND	ND	ND	ND	ND	ND	ND	x	x	x	x	x
Geography	GLO	GLO	EU	-	-	-	-	-	-	-	-	-	EU	EU	EU	EU	EU
Specific data used	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	+14% / -1% of GWP			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

*The reported share of primary data is associated with uncertainty, as one or several EPDs that are used as data source lack information on the share of primary data used.

Content information

The table below provides ranges for all products covered by this EPD.

Product components	Weight %	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Polypropylene	77.3-93.4%	0	0
Additives	3.2-7.3%	0	0
Release agent	0.4%	0	0
Re-granulate	3%	0	0
Other compounds (UV-compound, low friction inner layer)	0-12%	0	0
TOTAL	100%	0	0
Packaging materials	Weight, g/kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Plastic foil	22	2.2	0
Wooden pallet	95	9.5	0.048
Plastic foil around pallet	3.5	0.035	0
TOTAL	120.5	12.05 %	0.048

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
Not applicable	-	-	-

According to the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) Regulation, the product does not contain any substance included in the Candidate List of Substances of Very High Concern (SVHCs) for authorization with concentrations higher than 0,1% weight by weight (w/w).

Results of the environmental performance indicators

The results presented below correspond to 1 kg of representative product (20 mm with a standard flame retardants).

Calculations have been done using following EN15804+A2 method and EF 3.1 characterization factors.

The results of the LCA are relative expressions and do not predict the final impacts of any impact category, the exceeding of thresholds, safety margins or risks.

Mandatory impact category indicators according to EN 15804

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	2,01 E+00	ND	2,85 E-02	ND	0,00 E+00	2,59 E-02	1,03 E-03	1,14 E+00	- 7,91 E-01						
GWP-biogenic	kg CO ₂ eq.	- 1,42 E-01	ND	1,43 E-01	ND	0,00 E+00	8,34 E-06	3,70 E-06	4,36 E-06	4,81 E-02						
GWP-luluc	kg CO ₂ eq.	3,72 E-04	ND	2,08 E-06	ND	0,00 E+00	1,28 E-05	1,71 E-06	2,62 E-06	- 4,05 E-04						
GWP-total	kg CO ₂ eq.	1,86 E+00	ND	7,39 E-02	ND	0,00 E+00	2,59 E-02	1,03 E-03	1,14 E+00	- 7,43 E-01						
ODP	kg CFC 11 eq.	6,08 E-08	ND	9,57 E-11	ND	0,00 E+00	5,63 E-10	1,85 E-11	5,43 E-10	- 1,45 E-08						
AP	mol H ⁺ eq.	7,77 E-03	ND	2,24 E-05	ND	0,00 E+00	5,65 E-05	7,13 E-06	1,45 E-04	- 2,27 E-03						
EP-freshwater	kg P eq.	6,50 E-05	ND	5,18 E-08	ND	0,00 E+00	2,10 E-07	6,77 E-08	1,19 E-07	- 1,65 E-05						
EP-marine	kg N eq.	1,68 E-03	ND	8,70 E-06	ND	0,00 E+00	1,39 E-05	1,99 E-06	6,72 E-05	- 3,90 E-04						
EP-terrestrial	mol N eq.	1,98 E-02	ND	9,73 E-05	ND	0,00 E+00	1,45 E-04	2,21 E-05	7,68 E-04	- 4,41 E-03						
POCP	kg NMVOC eq.	8,56 E-03	ND	3,18 E-05	ND	0,00 E+00	8,78 E-05	6,70 E-06	2,08 E-04	- 2,15 E-03						
ADP-minerals&metals*	kg Sb eq.	3,11 E-03	ND	1,29 E-08	ND	0,00 E+00	8,46 E-08	8,36 E-09	1,65 E-08	- 1,82 E-06						
ADP-fossil*	MJ	8,42 E+01	ND	5,27 E-02	ND	0,00 E+00	3,67 E-01	1,98 E-02	5,54 E-02	- 2,32 E+01						
WDP*	m ³	1,74 E+00	ND	3,39 E-04	ND	0,00 E+00	1,52 E-03	1,82 E-04	1,78 E-03	- 3,67 E-01						
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption															

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Additional mandatory and voluntary impact category indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG[1]	kg CO ₂ eq.	2,01E+00	ND	2,85E-02	ND	0,00E+00	2,59E-02	1,03E-03	1,14E+00	-7,91E-01						
Particulate matter	diseases inc.	8,97E-08	ND	3,95E-10	ND	0,00E+00	1,92E-09	1,04E-10	1,18E-09	-1,81E-08						
Ionising radiation	kBq U-235 eq	1,52E-01	ND	6,59E-05	ND	0,00E+00	1,86E-04	1,35E-04	8,21E-05	-3,11E-02						
Ecotoxicity	CTUe	1,76E+01	ND	3,11E-02	ND	0,00E+00	1,82E-01	4,82E-03	2,14E-01	-8,03E-01						
Human toxicity, cancer	CTUh	2,52E-09	ND	1,34E-11	ND	0,00E+00	1,18E-11	6,39E-13	1,56E-10	-1,35E-10						
Human toxicity, non-cancer	CTUh	1,33E-07	ND	7,03E-11	ND	0,00E+00	2,61E-10	1,35E-11	9,23E-10	-2,91E-09						
Land use	Pt	1,58E+01	ND	3,03E-02	ND	0,00E+00	2,22E-01	1,07E-02	1,91E-02	-5,48E-01						

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

** When using the results of the production stage (modules A1-A3), the results of the end-of-life stage (module C) must be considered.

Resource use indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	3,06E+00	ND	8,29E-01	ND	0,00E+00	5,68E-03	1,65E-03	3,16E-03	0,00E+00						
PERM	MJ	6,68E-01	ND	-8,24E-01	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,00E-20						
PERT	MJ	3,73E+00	ND	5,03E-03	ND	0,00E+00	5,68E-03	1,65E-03	3,16E-03	1,00E-20						
PENRE	MJ	4,17E+01	ND	5,97E-01	ND	0,00E+00	3,67E-01	1,06E+01	1,91E+01	0,00E+00						
PENRM	MJ	4,25E+01	ND	-5,15E-01	ND	0,00E+00	0,00E+00	-1,06E+01	-1,90E+01	-1,00E-20						
PENRT	MJ	8,42E+01	ND	8,21E-02	ND	0,00E+00	3,67E-01	9,89E-03	5,54E-02	-1,00E-20						
SM	kg	3,09E-02	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
RSF	MJ	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
NRSF	MJ	0,00E+00	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
FW	m ³	4,10E-02	ND	2,73E-05	ND	0,00E+00	4,96E-05	1,22E-05	2,25E-04	0,00E+00						

Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water
----------	--

Waste indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	5,89 E-05	ND	3,16 E-07	ND	0,00 E+00	2,34 E-06	5,84 E-08	4,43 E-07	-2,08E-05						
Non-hazardous waste disposed	kg	9,38 E-02	ND	2,63 E-03	ND	0,00 E+00	1,83 E-02	7,19 E-05	3,13 E-01	-1,63E-02						
Radioactive waste disposed	kg	8,13 E-05	ND	4,89 E-08	ND	0,00 E+00	1,21 E-07	1,09 E-07	5,41 E-08	-2,49E-05						

Output flow indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00 E+00	ND	0,00 E+00	ND	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00E+00						
Material for recycling	kg	2,42 E-04	ND	3,59 E-02	ND	0,00 E+00	0,00 E+00	2,50 E-01	0,00 E+00	0,00E+00						
Materials for energy recovery	kg	0,00 E+00	ND	0,00 E+00	ND	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00E+00						
Exported energy, electricity	MJ	5,06 E-03	ND	1,39 E-01	ND	0,00 E+00	0,00 E+00	0,00 E+00	3,81 E+00	0,00E+00						
Exported energy, thermal	MJ	2,53 E-03	ND	6,93 E-02	ND	0,00 E+00	0,00 E+00	0,00 E+00	1,90 E+00	0,00E+00						

Additional Environmental Information

Variability of all impact categories between the reference product and products with the highest/lowest impacts is presented below.

Impact category	Unit	Product with the lowest impact	Reference product	Product with the highest impact
Climate change	kg CO2 eq	-1%	0%	13,2%
Climate change - fossil	kg CO2 eq	-1%	0%	13,0%
Climate change - biogenic	kg CO2 eq	6%	0%	4,4%
Climate ch. - lu and transform.	kg CO2 eq	13%	0%	32,4%
Ozone depletion	kg CFC11 eq	3%	0%	14,6%
Acidification	mol H+ eq	-15%	0%	43,4%
Eutrophication, freshwater	kg P eq	33%	0%	21,4%
Eutrophication, marine	kg N eq	-16%	0%	38,0%
Eutrophication, terrestrial	mol N eq	-23%	0%	43,0%
Photochemical ozone formation	kg NMVOC eq	-8%	0%	29,1%
Resource use, mineral, metals	kg Sb eq	-147085%	0%	76,2%
Resource use, fossils	MJ	-3%	0%	13,8%
Water use	m3 depriv.	-3%	0%	18,8%
Particulate matter	disease inc.	-11%	0%	33,0%
Ionising radiation	kBq U-235 eq	-2%	0%	15,8%
Ecotoxicity, freshwater	CTUe	5%	0%	31,7%
Human toxicity, cancer	CTUh	-118%	0%	64,9%
Human toxicity, non-cancer	CTUh	-1212%	0%	74,9%
Land use	Pt	2%	0%	6,5%

References

1. General Programme Instructions of the International EPD® System. Version 5.0.
2. EN 15804:2012+A2:2019. CEN TC 350. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. European standard.
3. LCA Background report – Preflex empty & pre-wired wire conduits September 2024, version 3.
4. CEN/TR 16970:2016. Sustainability of construction works - Guidance for the implementation of EN 15804
5. ISO 14025:2010: Environmental labels and declarations - General principles.
6. ISO 14040:2006: Environmental management – Life cycle assessment – Principles and framework.
7. JRC. 2018. <https://eplca.jrc.ec.europa.eu/ELCD3/>
8. Servaes, R., Allacker, K., Debacker, W., Delem L., De Nocker, L., De Troyer, F. Janssen, A., Peeters, K., Spirinckx, C., Van Dessel, J. (2013). Milieuprofiel van gebouwelementen. Te raadplegen via: www.ovam.be/materiaalprestatie-gebouwen.
9. Pré Consultants (2021). SimaPro 9.1.1.1 [Computer Software]. Amersfoort, The Netherlands
10. Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., and Weidema, B., 2016. The ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, [online] 21(9), pp.1218–1230. Available at: <http://link.springer.com/10.1007/s11367-016-1087-8> .

